




■ Carpet / Tiles / Timber / Laminates / Synthetics

Anhydrite Liquid Screed


□ System IDEAL ECO



- 1 Carpet / Tiles / Timber Laminates / Synthetics
- 2 Liquid Anhydrite Screed 35mm
- 3 System element ECO + pipe 30mm
- 4 Perimeter support batten
- 5 IDEAL ECO Perimeter insulation
- 6 Pavaboard, Rockfloor or similar 50mm+
- 7 DPM (if specified)
- Construction height 115mm+

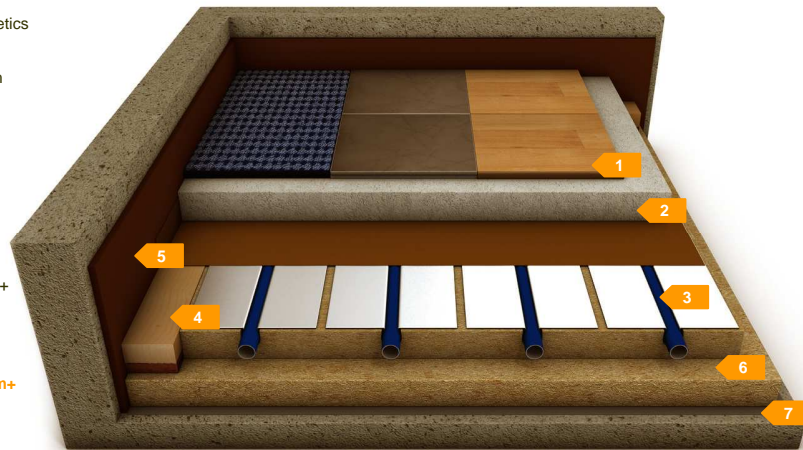

Technical Data Construction suitable for ground floor constructions

Construction height	mm	115+	Height dependant on primary insulation	
Weight	kg/m ²	82	Weight without floor finish	
Thermal resistance R	m ² K/W	variable		
Heat exchange coefficient	W/m ² K	variable		
Live design load	kN/m ²	2,0		
Point load (≥ 20cm ²)	kN	≤1,0		
Impact sound reduction	dB	≥ 26	Valid on concrete floors >12cm (DIN EN 4109: m ² > 276kg/m ²)	
Area of application Ground floors or floors located above unheated rooms such as garages 	This construction is suitable for ground floor constructions. Overall construction height and number of layers is critical in dry installed ground floor constructions. For further assistance please contact us.			
Specific installation requirements	Substrate must be solid, level and flat so that the heating elements can lie flat. Tolerance required as per DIN 18202 table 3, group 4. Please check with your provider of insulation to check compressive strength and insulation value to height ratio. High compressive strength is a prerequisite within dry installed constructions.			